

RCA 88740

CITED BY APPLICANT

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ : H04B 10/00	A2	(11) International Publication Number: WO 97/26721 (43) International Publication Date: 24 July 1997 (24.07.97)
(21) International Application Number: PCT/US97/00359 (22) International Filing Date: 15 January 1997 (15.01.97) (30) Priority Data: 60/009,954 16 January 1996 (16.01.96) US (71) Applicants: NOKIA MOBILE PHONES LIMITED [FI/FI]; P.O. Box 86, FIN-24101 Salo (FI). NOKIA MOBILE PHONES INC. [US/US]; Suite 900, 6200 Courtney Camp- bell Causeway, Tampa, FL 33607 (US). (72) Inventor: PETRI, Nykanen; Apartment 2096, 1120 Hidden Ridge Drive, Irving, TX 75038 (US). (74) Agent: GREEN, Clarence, A.; Perman & Green, 425 Post Road, Fairfield, CT 06430 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With declaration under Article 17(2)(a). Without abstract; title not checked by the International Searching Authority.</i>
(54) Title: TRANSACTION SUPPORT FOR IrDA-COMPATIBLE SYSTEMS		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

TRANSACTION SUPPORT FOR IrDA-COMPATIBLE SYSTEMS

CLAIM OF PRIORITY BASED ON CO-PENDING PROVISIONAL
APPLICATION

5 The present application is related to co-pending
Provisional patent application Ser.No. 60/009,954 of Petre
Nykanen, filed 01/16/96, entitled "TRANSACTION SUPPORT FOR
IrDA-COMPATIBLE SYSTEMS", and based on which priority is
herewith claimed under 35 U.S.C. 119(e) and the disclosure
of which is incorporated herein by reference in its
10 entirety.

BACKGROUND OF THE INVENTION

Field of the Invention:

The present invention relates to protocols for use with
infra-red (IR) transmitting devices, e.g., the IrDA (Infra-
15 red Data Association) transmission protocols, and, more
particularly, to a method and means for providing
transition support for IrDA-compatible systems including
transceivers with media sense.

Prior Art:

20 The Media Access Control (MAC) rules of the IrLAP (Link
Access Protocol) specification presently being discussed by
the IrDA for standardizing infra-red (IR) communications
(this and related standards information are available
electronically on the IrDA web site located at "irda.org")
25 require that before initiating an IR transmission a
transceiver device must be set to listen for at least 500
ms and detect no IR data link connection during that time.
This 500 ms delay may cause problems with certain systems
in which the IrLAP specification might be applied, such as
30 remote controllers. These delay problems can be avoided to
some extent if the transmitter device is set to
continuously listen in the IR domain. In such case, if no

IR traffic is detected when transmission is requested, a connection-less data transmit request can be fulfilled instantaneously, whereas in the usual case connection-less services are slowed down. However, such continuously
5 listening devices have a major drawback when traffic is detected in the IR domain as the device is rendered useless until the IR domain is free and available to transmit.

Alternative approaches that could be used to make the IrDA protocols more attractive for use with remote controllers,
10 include:

the MAC rules could be relaxed in the IrLAP specifications in such a way that the connection-less data service would have relaxed MAC, since connection-oriented data transmission is able to recover from
15 occasional lost frames when prevented from being sent by a connection-less data frame; or

low-end devices could be authorized to emit a connection-less data frame even if they detect other traffic, but some rules concerning timing limits would
20 have to be generated so that the connection-less data would not destroy a link connection; or

the user data for higher layers, i.e., objects, could be placed in the XID frames used for sniffing, which would give access to the relaxed MAC of the sniffing
25 frames.

From a hardware standpoint, systems in the consumer electronics field require longer transmission distances than those supported by most IrDA-SIR (the official IrDA specification) implementations. Thus, consumer electronics
30 applications may require changes in the IrDA-SIR definition for the minimum distance required from transceiver devices and for the maximum output power that may be used.

The IrDA connection-oriented data service specifications do not fit inside the limitations of consumer electronics devices. The size of the implementation and the processing power required rule out the use of the connection-oriented data service as a viable option in this regard. To achieve connectivity between IrDA devices supporting IrDA specifications and devices in the consumer electronics field, a common minimum functionality must be selected in such a way that both high-end desk top systems and low-end systems, such as remote controllers, can rely on this functionality.

Problem to be Solved:

It is therefore a problem in the art to combine the functionality of the connection-less data service of the IrLAP and IrLMP (Link Management Protocol) with object encapsulation rules, as defined in IrDA object exchange (OBEX) specifications, to accomodate various IR transceiver devices particularly those used in consumer electronics.

Object:


It is accordingly an object of the present invention to provide a method and means for providing transaction support for IrDA-compatible systems including transceivers with media sense.

It is another object of the present invention to provide such support by placing the object exchange rules of the IrDA OBEX specifications in the data of the connection-less service of the IrLAP and IrLMP protocols.

SUMMARY OF THE INVENTION

The present invention involves a method and means to adapt the MAC rules of the IrLAP specification to accomodate various IR transceiver devices with or without media sense. The invention utilizes an IrDA protocol stack having a

series of layers including:

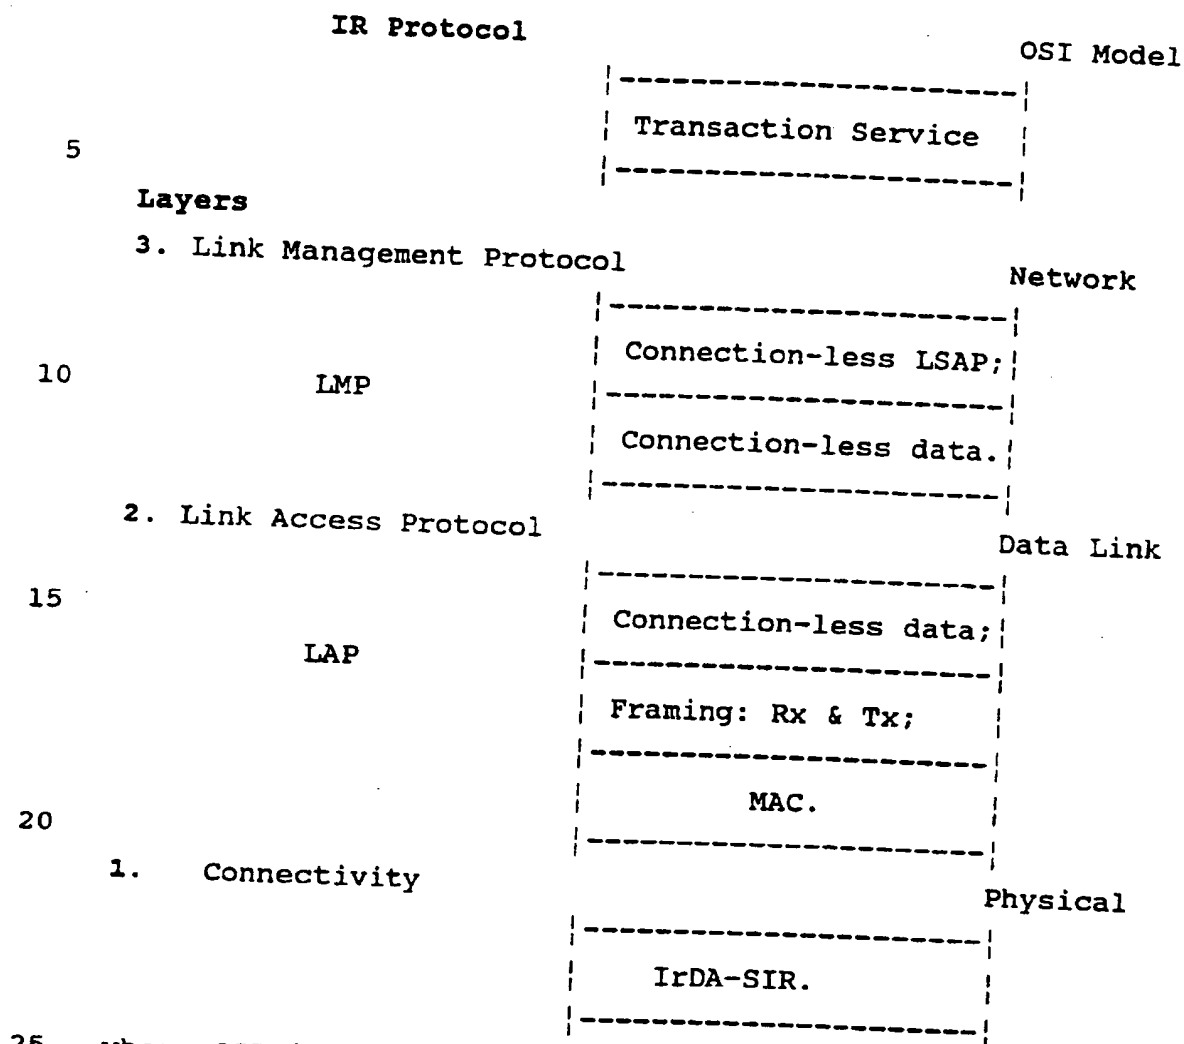

where OSI is Open Systems Interconnection and LSAP is the Link Service Access Point.

This kind of protocol stack can be applied to a very large variety of devices, such as, remote controllers with feedback for tuners, televisions, videos, audio equipment, and PCs. Also, it can be used for data transactions by request, e.g., pager reporting of received numbers, phone reporting of caller ID, or cellular telephone sending of a phone book entry. Further, it is applicable to data acquisition systems, such as, portable GPS reporting of changes of location and medical systems.

Various ways for implementing the invention comprise:

Using the connection-less data service;

Using XID frames; or


Using proprietary or open object definitions.


- 5 The preferred approach is to use the connection-less data service that is already present in the IrDA specification along with the emerging OBEX object definitions. This approach requires no changes in existing systems and the open service specification ensures connectivity between
- 10 systems from different vendors.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention is directed to a method and means for adapting the Media Access Control rules of the IrLAP specification to accomodate various IR transceiver devices

15 with or without media sense, particularly those used in consumer electronics. As seen in the following diagram, the invention preferably comprises an IrDA protocol stack having a series of functional layers, along the lines of the Open Systems Interconnection (OSI) Model, including:

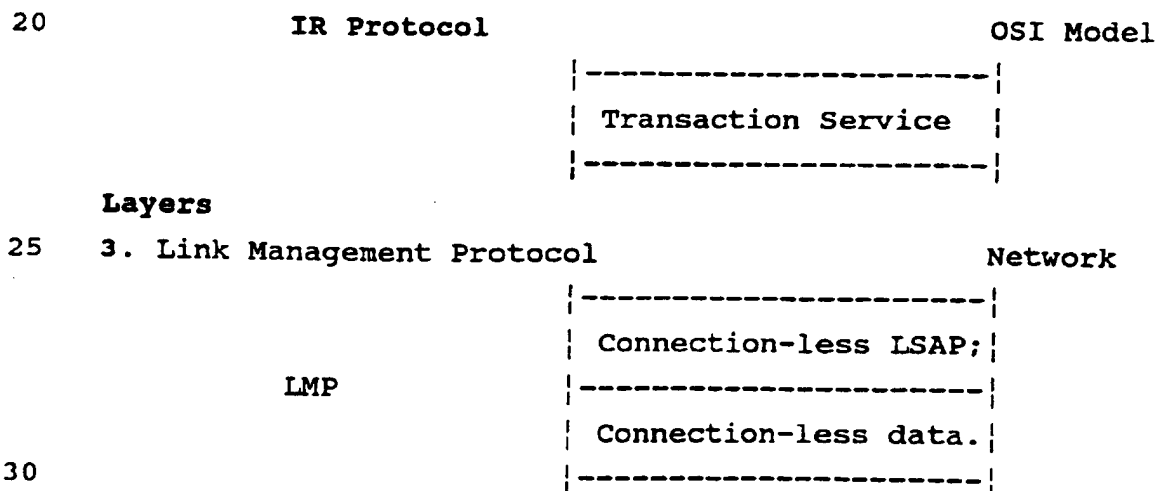

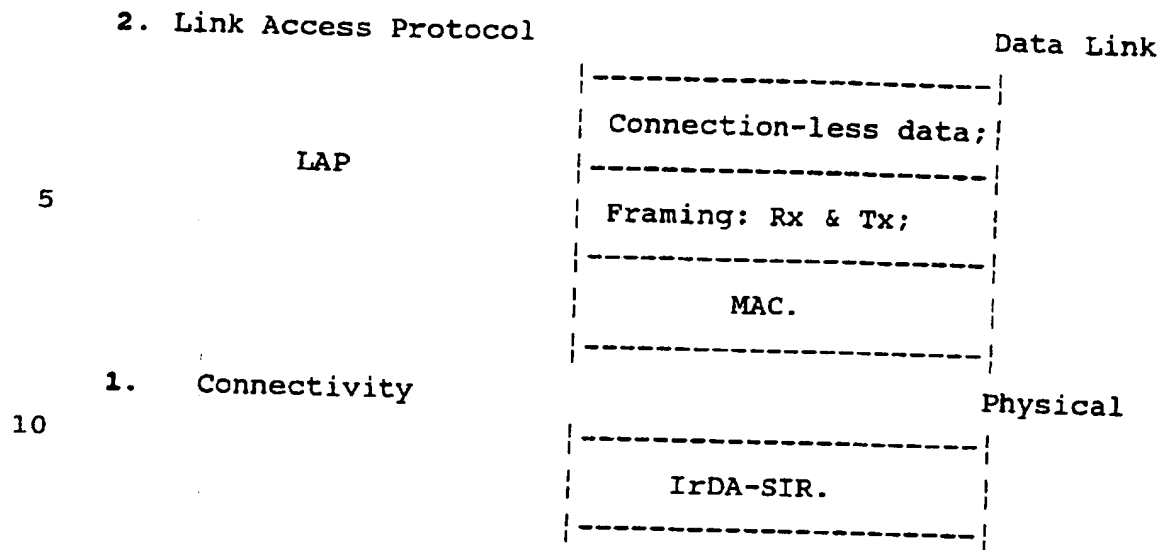

where OSI is Open Systems Interconnection and LSAP is the Link Service Access Point.

15 The Physical layer, Layer 1., may be different from device to device. The IrDA-SIR, the official IrDA specification, i.e., involving speeds up to 115.2 kbit/sec, is shown in the diagram. However, other such specifications might be used, such as the IrDA-FIR, which is a proposed Fast IR with speeds up to 1.152 Mbit/sec and 4 Mbit/sec, and the Sharp DASK, which is a Sharp specific system with speeds up to 57.6 kbit/sec.

25 The Data Link layer protocol is the IrLAP protocol layer, Layer 2. This protocol supports discovery of other devices and reliable data transmission service. This layer must follow MAC rules as well as indicating correctly to other devices that the IR medium is in use.

30 The Network layer protocol is the IrLMP protocol layer, Layer 3. This protocol supports service-to-service connection binding, and division of the reliable IrLAP connection to multiple channels. This frame-by-frame multiplexing enables multiple concurrent services.

On top of the IrLMP layer there may be multiple protocols implementing various functions, such as those of a transport layer, i.e., segmentation and reassembly, flow control, and so on. The layer on top of the others is the application layer which contains the services that support functions needed by applications, such as the IrDA specified Information Access Service (IAS). The IAS consists of a client and server, with the client being able to make inquiries to the server concerning services that the host system supports. The server fetches information from a local database consisting of service instance specific information, the most important piece of which information is the LSAP ID (Link Service Access Point) at which the service instance is located in the host system. This information is used when service-to-service connection is made.

By way of the functions of the layers, the following description illustrates some of the more important features in this regard.

20 Discovery:

The discovery process, supported by the Data Link layer protocol, i.e., the IrLAP protocol layer, Layer 2, is used to enable a station to find out what other devices can be seen in the IR medium. This process is implemented by the IrLAP layer, though it is channeled through the IrLMP layer to the users of that layer. The discovery process is dynamic, and so allows multiple devices to be identified by one query. Every responding device may return to the initiator:

- 30 1) a 32 bit device address (variable by specification);
- 2) service hints by means of a bitfield indicating the service categories supported, for example, fax, modem, telephony, PDA and printer; and

- 3) a name of the device, e.g., a user definable string such as "Bob's PDA".

After discovery, the user may make a selection of the host device to be connected to, or the connection establishment may be made automatically. To find out if the specific service is supported by the host system, the IAS service connection may be established.

IAS access:

The IAS service access is used to find out if the host system supports the service that is required. If there are multiple host systems, an IrLAP connection is made with all of them, one by one, to find out which system supports the required service. This IAS access may be done through binding the local LSAP X with the host LSAP 0, with the IAS server always being resident at LSAP 0. The information that is fetched by the local IAS client from the host IAS database is defined in the service specification. The information may vary depending on the service, but one or two things that will always be present are the instance name of the service and the LSAP at which it can be accessed on the host system.

Service Connection Establishment:

When the desired host with the required service is located, a service-to-service connection is established. This service connection is not active until the local LSAP is bound with the host LSAP by the IrLMP layer. In this binding the LSAPs are interconnected so that data coming to the local LSAP from the bound host LSAP is accepted, and vice versa. After this point the service specific protocol may be activated.

The IrLMP LSAP binding primitives may contain a field of user data (up to 60 octets). This data can be used in the connection establishment for such purposes as exchanging

encryption keys. The encryption method, if any, is such that the service implementation may use any available encryption method. Common to all these methods is, that their area of influence is limited to the data transmitted between the two given LSAPs. IrLAP or IrLMP protocol specific fields in the frames are not affected by the encryption. A third party may be able to see that transactions are taking place between the two service instances, but is unable to decipher the actual data content.

Implementation:

The implementation of the protocol stack should be such that the end user is given an indication when the IrLAP layer connection is lost. The IrDA specification dictates that a "No Activity" indication be given to the end user when the link has been lost for 3 seconds. The actual service connection will be lost when a disconnect indication is received. This may happen when the link has been lost from 8 to 40 seconds (a negotiated value).

20 Intermediate Node:

The IrDA protocol stack of the invention may act as an intermediate node between two devices supporting known services. In such an implementation, there are five important factors to be taken into consideration:

- 25 - the service specification and the IAS information
- implementation of the connection establishment
- use of encryption
- user interaction and indications
- interfacing to the existing service protocol stack.

30 In general, it is important to understand the extent of the IrDA specifications in this regard in that some things are left out on purpose, to give the designer the freedom of different implementation choices. It will be within the

purview of those of skill in the art to implement the invention in the context of the IrDA specifications.

This kind of protocol stack can be used in a very large variety of devices, such as, remote controllers with
5 feedback for tuners, as well as televisions, videos, audio equipment, and PCs. Also, it can be used for data transactions by request, e.g., pager reporting of received numbers, phone reporting of caller ID, or cellular
10 telephone sending of a phone book entry. Further, it is applicable to data acquisition systems, such as, for portable GPS reporting of changes of location and medical systems.

Various ways for implementing the invention comprise:

Using the connection-less data service;
15 Using XID frames; or
Using proprietary or open object definitions.

The preferred approach is to use the connection-less data service that is already present in the IrDA specification along with the emerging OBEX object definitions. This
20 method requires no changes in existing systems. The open service specification ensures connectivity between systems from different vendors. Connection-oriented data may also be used but not in all situations because the MAC rules, or the size of the implementation, or the performance of the
25 microprocessor.

The invention makes it possible for the consumer electronics industry to implement the IrDA protocols in their systems so that the manufacturers of these systems will be inclined to adopt the IrDA hardware specifications.
30 This will promote standardization of the IR protocols. The hardware specifications may require some changes concerning the distance and the output power of the IR systems, but

support of the common hardware is the basic requirement for connectivity.

5 Supporting the same hardware platform and the same IrDA protocols in both the communications and consumer electronics industries should attract more and more companies to consider the connectivity as a value in the market. This support also means that many interference issues would be avoided, because the IrDA protocols do support Media Access Control to minimize interference.

10 The invention can be applied to a very large variety of devices such as the aforementioned remote controllers for tuners, televisions, videos, audio equipment, and PCs, as well as phones, cellular phones, pagers, toys, data
15 generating systems such as portable GPS receivers, watches or PIMs with alarms or time functions or for the entering of appointments.

Even though the IrDA protocols can be used for the systems in the consumer electronics field without modifications, there may be some changes required in the IrDA IrLAP media
20 access rules and in the hardware layer specifications, which changes will be within the skill of the art in the light of the foregoing descriptions.

CLAIMS

What is claimed is:

1. An IrDA protocol stack having a series of layers comprising:

Layers

3. Link Management Protocol

LMP

Connection-less LSAP;

Connection-less data.

2. Link Access Protocol

LAP

Connection-less data;

Framing: Rx & Tx;

MAC.

1. Connectivity

kbit/sec.

where LSAP is the Link Service Access Point.

2. An IrDA protocol stack as in claim 1 wherein said stack is implemented using the connection-less data service.


3. An IrDA protocol stack as in claim 2 wherein said connection-less data service is that already present in the IrDA specification along with the emerging OBEX object definitions.

4. An IrDA protocol stack as in claim 1 wherein said

stack is implemented using XID frames.

5. An IrDA protocol stack as in claim 1 wherein said stack is implemented using proprietary or open object definitions.

6. An IrDA protocol stack as in claim 1 wherein the layer on top of said Layer 3 comprises:




7. An IrDA protocol stack as in claim 1 wherein the layer on top of all other layers comprises:

an application layer which contains the services that support functions needed by applications.

8. An IrDA protocol stack as in claim 9 wherein said services comprise the IrDA specified Information Access Service (IAS).

9. An IrDA protocol stack as in claim 1 wherein said stack is implemented using an Open Systems Interconnection (OSI) Model as follows:

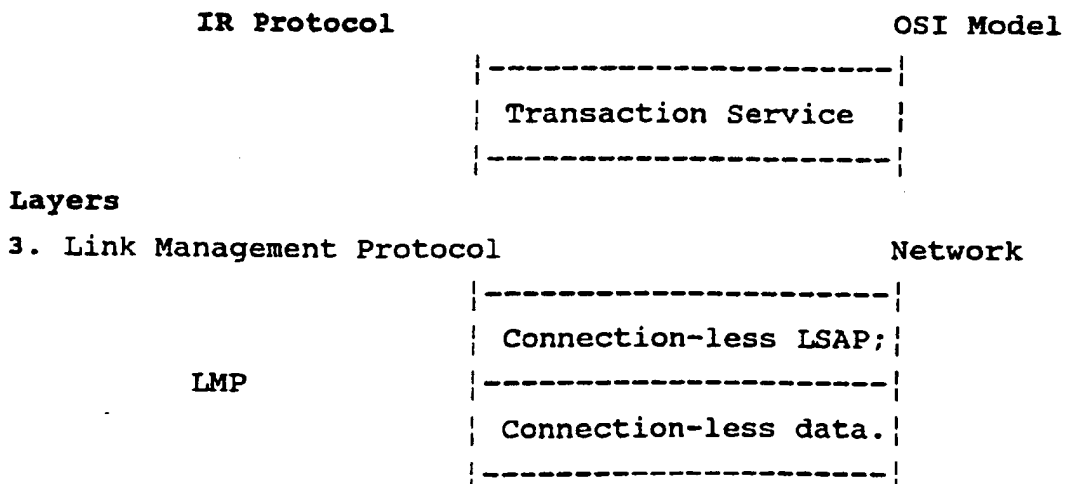

2. Link Access Protocol

Data Link

LAP

Connection-less data;

Framing: Rx & Tx;

MAC.

1. Connectivity

Physical

IrDA-SIR.

10. An IrDA protocol stack as in claim 1 wherein said stack is implemented using the connection-less data service that is already present in the IrDA specification along with the emerging OBEX object definitions.

11. An IrDA protocol stack as in claim 1 wherein said Link Access Protocol layer, Layer 2, supports discovery of other devices and reliable data transmission service.

12. An IrDA protocol stack as in claim 1 wherein said Link Management Protocol layer, Layer 3, supports service-to-service connection binding, and division of the reliable IrLAP connection to multiple channels whereby the frame-by-frame multiplexing enables multiple concurrent services.

PATENT COOPERATION TREATY

PCT

DECLARATION OF NON-ESTABLISHMENT OF INTERNATIONAL SEARCH REPORT

(PCT Article 17(2)(a) and Rule 39)

Applicant's or agent's file reference 373P006259WO	IMPORTANT DECLARATION	Date of mailing (day/month/year) 20 MAY 1997
International application No. PCT/US97/00359	International filing date (day/month/year) 15 JANUARY 1997	(Earliest) Priority Date (day/month/year) 16 JANUARY 1996
International Patent Classification (IPC) or both national classification and IPC Please See Continuation Sheet.		
Applicant NOKIA MOBILE PHONES LIMITED		

This International Searching Authority hereby declares, according to Article 17(2)(a), that no international search report will be established on the international application for the reasons indicated below.

1. ☒ The subject matter of the international application relates to:
 - a. ☐ scientific theories.
 - b. ☐ mathematical theories.
 - c. ☐ plant varieties.
 - d. ☐ animal varieties.
 - e. ☐ essentially biological processes for the production of plants and animals, other than microbiological processes and the products of such processes.
 - f. ☐ schemes, rules or methods of doing business.
 - g. ☒ schemes, rules or methods of performing purely mental acts.
 - h. ☐ schemes, rules or methods of playing games.
 - i. ☐ methods for treatment of the human body by surgery or therapy.
 - j. ☐ methods for treatment of the animal body by surgery or therapy.
 - k. ☐ diagnostic methods practiced on the human or animal body.
 - l. ☒ mere presentations of information.
 - m. ☐ computer programs for which this International Searching Authority is not equipped to search prior art.

2. ☒ The failure of the following parts of the international application to comply with prescribed requirements prevents a meaningful search from being carried out:

☐ the description
☒ the claims
☐ the drawings

3. ☐ The failure of the nucleotide and/or amino acid sequence listing to comply with the prescribed requirements prevents a meaningful search from being carried out:

☐ it does not comply with the prescribed standard
☐ it is not in the prescribed machine readable form

4. Further comments:
Please See Continuation Sheet.

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer KINFÉ-MICHAEL NEGASHI
Facsimile No. (703) 305-3230	Telephone No. (703) 305-4932

**DECLARATION OF NON-ESTABLISHMENT OF
INTERNATIONAL SEARCH REPORT**

International application No.
PCT/US97/00359

The International Patent Classification (IPC) or National Classification and IPC are as listed below:

HO4B 10/00
359/109

4. Further Comments (Continued):

The claims are directed to subject matter set forth under PCT Rule 39.1(V). Specifically, the claims are directed to an IrDA protocol and do not involve an apparatus or method in which the protocol is used. Even though protocols are applicable in communication systems, the claims do not specify the industrial use of the protocols. Therefore, a meaningful search can not be established upon the reading of the claims.